

CMP


WIRE TYPE

PMH 피엠헤이테크 itech

■ Sub-Title

케이블 센서,
ABSOLUTE 타입 위치.

■ DIMENSION

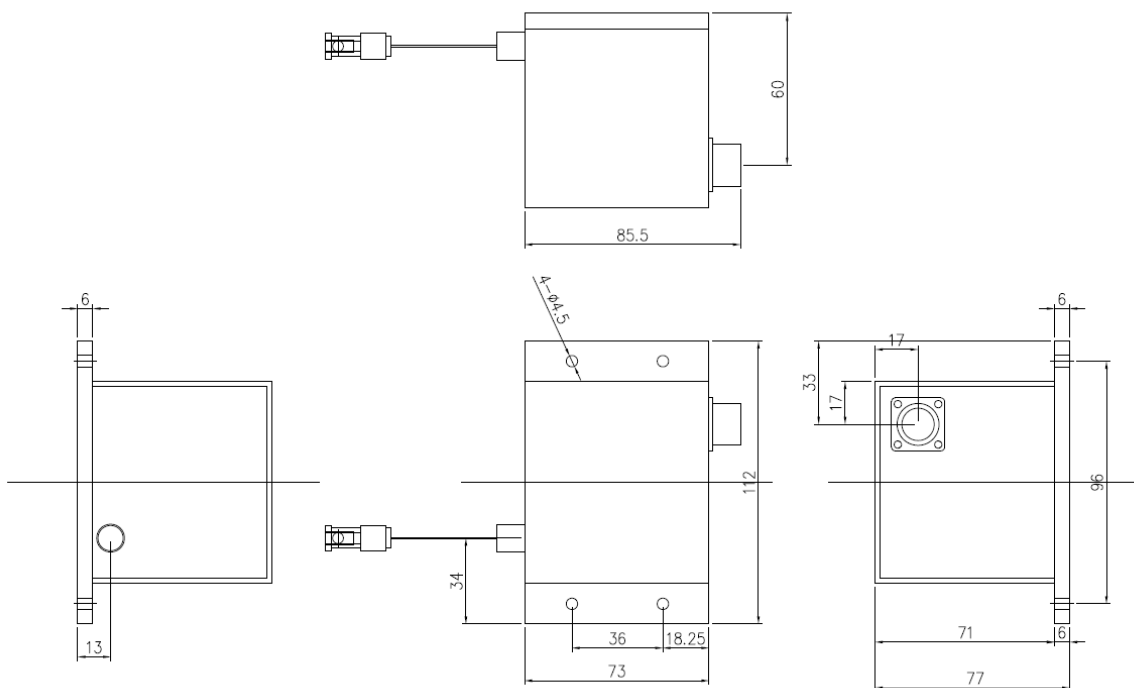

CMP-500, 1000

■ FEATURE


측정범위	500 mm, 1000 mm
출력	Volt divider, 4~10mA, 1~5mV/V
오차율	0.2~0.3%
반복성	0.2%
인가전압	Volt divider : 1~12V DC, 4~20mA : 7.5~36 V dc (추천: 24V dc), mV/V : 1~12V dc
보호등급	IP 50
작동온도, 습도	-25~85 degree, 100%@32 degree
작동온도	-25~85 degree

CMP

PMH 피엠헬하이테크 itech


■ SIGNAL

VOTAGE OUTPUT (VOLT DIVIDER)

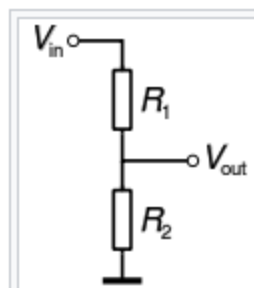

EXC + : RED

SIG + : BLACK

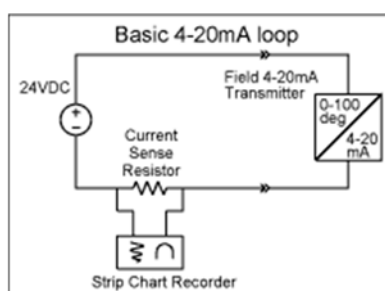


Wheat stone (mV/V)

EXC + : RED

EXC - : BLACK

SIG + : GREEN

SIG - : WHITE



■ MODEL NUMBER

CMP- A - B - C -

A : RANGE (500mm, 1000mm)

B : SIGNAL (V : 가변저항 , C : 4~20 mA , R : mV/V)

C : T - TAJIMI CONNECTOR (기본) , 케이블(TAJIMI 암놈 2M)

G - GRAND CABLE , 길이 포함 (EX: G 1M- 케이블 2M)